

# THERMAL SPRAY FLEXICORD

Technical Bulletin



## TITANIA

Ceramic series – ref : 98212 1047 000

TITANIA Flexicord is designed to be sprayed with our MASTER JET® flame spray gun. TITANIA Flexicord provides: black color, dense, smooth and wear resistant coatings. Not subject to static electricity build-up.

### Applications

Slightly conductive coating. Suitable for anti-static coating, IR absorption (up to 400°C) and diffusion surface (heater, furnaces, components). High thickness rebuilding solution for Alumina-Titania ceramic coating.

### Typical composition (%) - T<sup>TIP</sup>

TiO <sub>2</sub>	100
------------------	-----

### Color code


Skin	Red
------	-----

### Packaging

Ø Flexicord	4,75 mm +/- 0,1mm
-------------	-------------------

Spool	Plastic - SD 300mm
-------	--------------------

Weight	5,5 Kg +/- 10%
--------	----------------

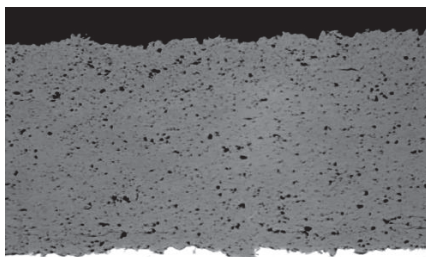


Typical microstructure of Titania sprayed with our Master Jet® flame spray gun.

### Coating features


Porosity	3%
Pore diameter	~5 µm
Roughness Ra (as sprayed)	4,5 - 8 µm
Hardness	750 - 900 Hv <sub>300</sub>
Density	4,1 g/cm <sup>3</sup>
Deposit Efficiency	60%

### Gun configuration

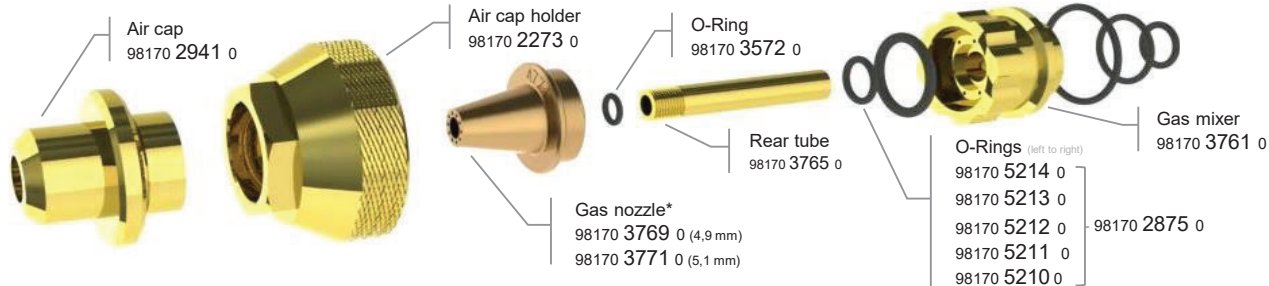


\*Use 4,9 mm in dry area – 5,1 mm in wet area

### Spray parameters

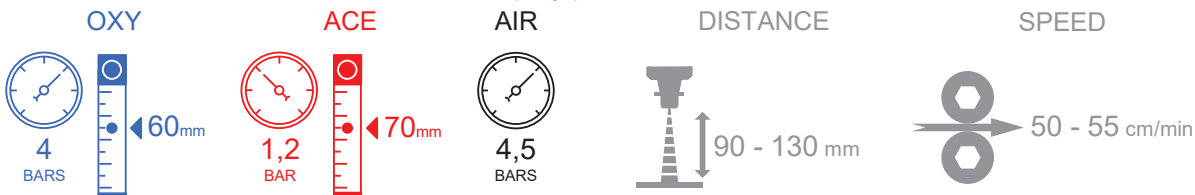

### Production performances

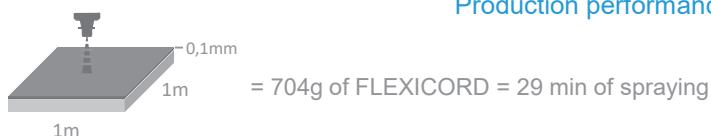

SAINT-GOBAIN COATING SOLUTIONS

